



METCOE *Spring-Lock* FLASHINGS

Designed and Manufactured Exclusively by Metcoe Metal Products Company

Jan 1, 1961
Alice - IMPORTANT
File this where we
can find it -! There's a
definite need for this!
JH

**AUTOMATIC
INSTALLATION**

**SUBSTANTIAL
SAVINGS**

**CLEAN
DESIGN**

NEW METCOE *Spring-Lock* FLASHINGS


ONE MAN...IN HALF THE TIME OF TWO!

It's a fact: one man, installing *Spring-Lock* flashing can do the job in half the time required by two men using ordinary flashing. The reason? *Spring-Lock* is so simple to use. *Spring-Locks* are inserted by hand in the reglet every 30"—and the counterflashing snapped into place automatically with end closures provided to give a finished and weathertight installation.

Once installed, the self locking patented *Spring-Locks* hold the positive locking counterflashing securely under tension; yet can quickly and easily be removed.

SAVE UP TO A THIRD

Metcoe *Spring-Lock* Flashings are competitively priced, even though a comparable product—either in quality or design—is not available. This together with *Spring-Lock*'s speed and ease of installation results in at least a third saving over ordinary flashing jobs.

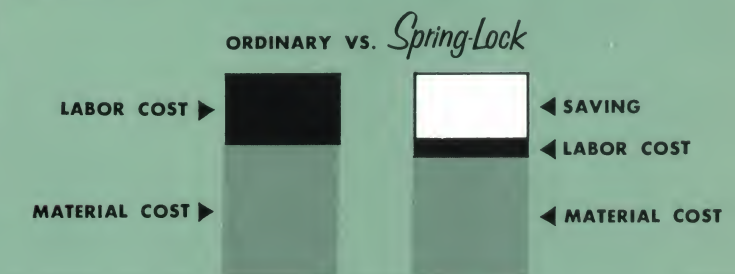

NO EXPOSED SCREWS OR CLIPS

Spring-Locks are completely hidden from view, binding counterflashing to reglet. The finished job is clean and smooth without any screws or clips to mar the modern appearance. *Spring-Locks* will never rust or corrode because they are made of a special Stainless Steel compatible with all ferrous and nonferrous metals. Thus, for added service and beauty, reglets and counterflashings are available in any metal materials specified.

CONNECTORS




JOINT CONNECTOR



INSIDE CORNER



OUTSIDE CORNER
CONCRETE



JOINT CONNECTOR



OUTSIDE CORNER



INSIDE CORNER

BRICK




OUTSIDE CORNER



INSIDE CORNER

STUCCO




OUTSIDE CORNER



INSIDE CORNER

TILT-UP &
EXISTING WALL




END CLOSURES

MANUFACTURED EXCLUSIVELY BY

METCOE *Metal Products Co.*

P.O. Box 34851, Palms Station, Los Angeles 34, California • Webster 6-1154

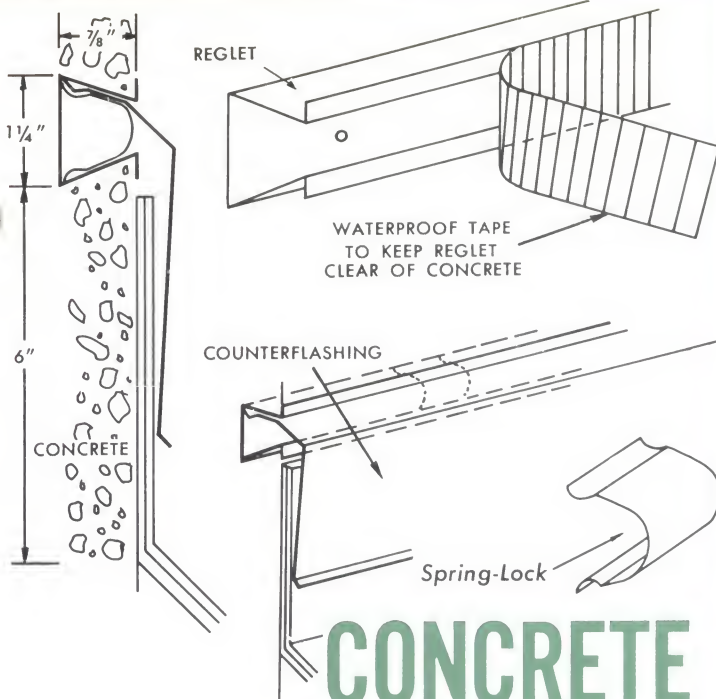


CONCRETE Spring-Lock* FLASHING

SPECIFICATIONS

Furnish and install, as per manufacturer's specifications, Metcoe Concrete Spring-Lock reglet and snap in positive lock counterflashing of 24 gauge galvanized iron, unless otherwise specified, with Stainless Steel Spring-Locks at 30" on center. Use joint connectors, corners, and end closures as required.

Upon request of the Architect or the General Contractor, Metcoe Metal Products will furnish a free inspection service.

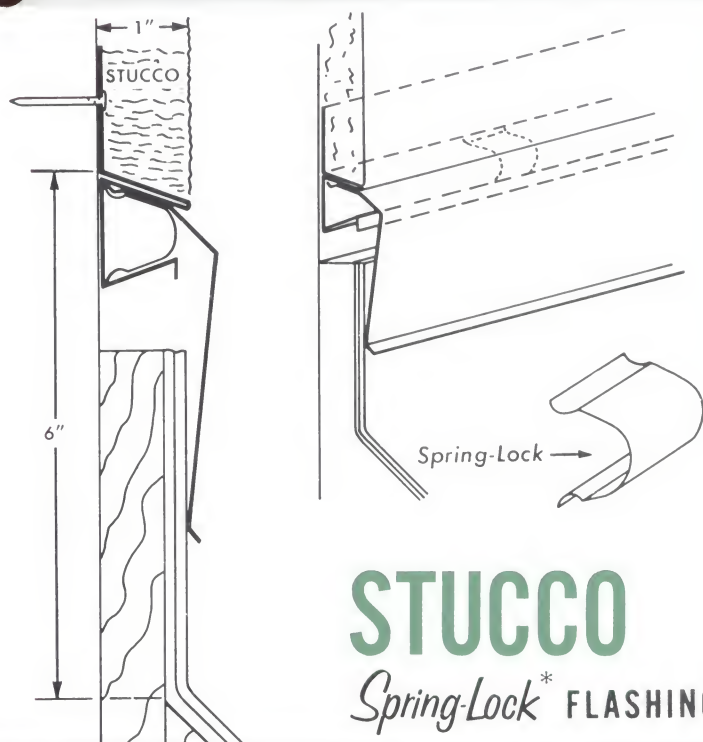


STUCCO Spring-Lock* FLASHING

SPECIFICATIONS

Furnish and install, as per manufacturer's specifications, Metcoe Stucco Spring-Lock reglet and snap in positive lock counterflashing of 24 gauge galvanized iron, unless otherwise specified, with Stainless Steel Spring-Locks at 30" on center. Use Corners and end closures as required.

Upon request of the Architect or the General Contractor, Metcoe Metal Products will furnish a free inspection service.

*SPRING-LOCK PATENT PENDING

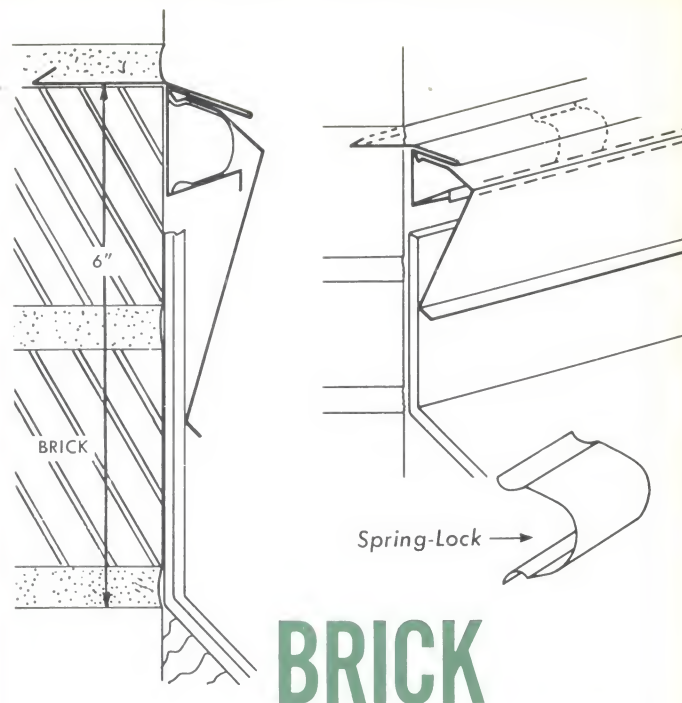


BRICK Spring-Lock* FLASHING

SPECIFICATIONS

Furnish and install, as per manufacturer's specifications, Metcoe Brick Spring-Lock reglet and snap in positive lock counterflashing of 24 gauge galvanized iron, unless otherwise specified, with Stainless Steel Spring-Locks at 30" on center. Use corners and end closures as required.

Upon request of the Architect or the General Contractor, Metcoe Metal Products will furnish a free inspection service.

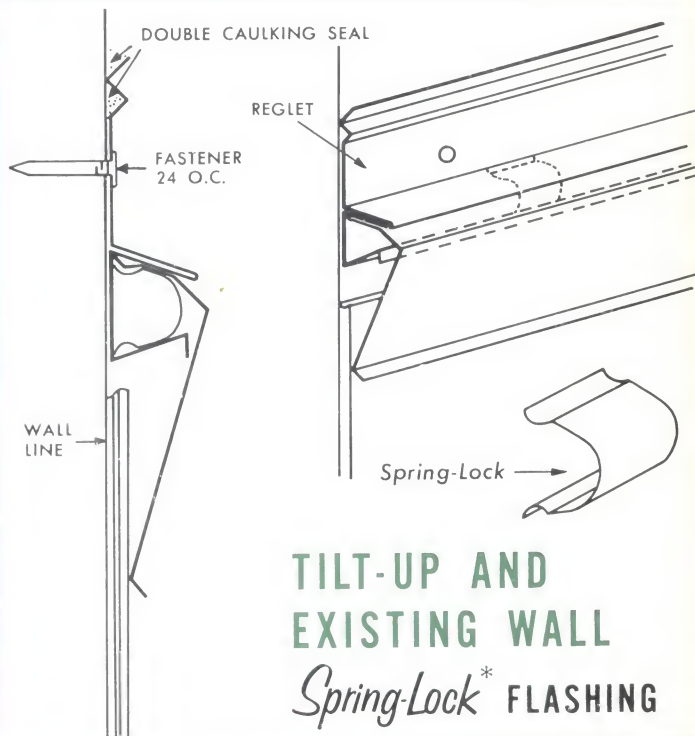

TILT-UP AND EXISTING WALL Spring-Lock* FLASHING

SPECIFICATIONS

Furnish and install as per manufacturer's specifications, Metcoe Tilt-Up and Existing Wall Spring-Lock reglet with double caulking seal and snap in positive lock counterflashing of 24 gauge galvanized iron (unless otherwise specified). Permanent reglet fastened to the wall with approved fasteners spaced not more than 24" O.C. Lap ends 3" and caulk. Stainless Steel Spring-Locks set 30" O.C. Snap in positive lock counterflashing set in place with 3" end lap. Use corners and end closures as required.

Upon request of the Architect or the General Contractor, Metcoe Metal Products will furnish a free inspection service.

METHOD OF INSTALLATION AND MANUFACTURER'S SPECIFICATIONS

INSTALLATIONS

L. A. Dept. of Water and Power
Los Angeles Fire Dept.
Pacific Tel & Tel
Security-First National Banks
Pacific State Bank
American Savings and Loan,
Temple City
Thrifty Drug Stores
Ralph's Markets
Safeway Markets
Alpha Beta Markets
Boys Markets
Shopping Bag Markets
Thrifty Mart Markets
Fox Markets
Max Factors, Hawthorne
Eastland Shopping Center
Sunset International Building,
Beverly Hills
Buckeye Buildings
and many commercial and
industrial buildings.

CONCRETE SPRING-LOCK

Where indicated on the drawings: Sheet Metal Contractor will furnish Concrete Spring-Lock reglet and snap in positive lock counterflashing of gauge and material specified, as manufactured by Metcoe Metal Products Co., Webster 6-1154. Reglet to be supplied to General Contractor for installation 6" above roof cant strip. Counterflashing to be installed by Sheet Metal Contractor. Stainless Steel Spring-Locks to be set 30" on center. Snap in positive lock counterflashing to be set in place with 3" minimum end lap and end closures as needed. Inside corners, outside corners and joint connectors shall be installed with reglet where needed.

BRICK SPRING-LOCK

Where indicated on the drawings: Sheet Metal Contractor will furnish Brick Spring-Lock reglet and snap in positive lock counterflashing of gauge and material specified, as manufactured by Metcoe Metal Products Co., Webster 6-1154. Reglet to be supplied to General Contractor for installation 6" above roof cant strip. Counterflashing to be installed by Sheet Metal Contractor. Stainless Steel Spring-Locks to be set 30" on center. Snap in positive lock counterflashing to be set in place with 3" minimum end lap and end closures as needed. Inside corners, outside corners and joint connectors shall be installed with reglet where needed.

STUCCO SPRING-LOCK

Where indicated on the drawings: Sheet Metal Contractor will furnish and install Stucco Spring-Lock reglet and counterflashing of gauge and material specified, as manufactured by Metcoe Metal Products Co., Webster 6-1154. Reglet to be installed 6" above roof cant strip with 3" minimum end lap. Stainless Steel Spring-Locks to be set 30" on center. Snap in positive lock counterflashing to be set in place with 3" minimum end lap and end closures as needed. Inside corners and outside corners shall be installed with reglet where needed.

TILT-UP AND EXISTING WALL SPRING-LOCK

Where indicated on drawings: Sheet Metal Contractor will furnish and install Tilt-Up and Existing Wall Spring-Lock reglet and counterflashing of gauge and material specified, as manufactured by Metcoe Metal Products Co., Webster 6-1154. Reglet "V" groove to be filled generously with approved caulking compound before reglet is applied to wall. Use only approved fasteners spaced at a maximum 24" on center. Reglet to be lapped and caulked 3" minimum and exposed lip well filled with second caulking seal, so designed to form a permanent reglet and seal.* Stainless Steel Spring-Locks set 30" on center. Snap in positive lock counterflashing to be set in place with 3" minimum end lap and end closures where needed. Inside corners and outside corners shall be installed with reglet where needed.

*Competitive flashings require removal and replacement of water seal for inspection or repair of roof. Metcoe Tilt-Up and Existing Wall Spring-Lock reglets are permanent and it is only necessary to remove and replace the counterflashing. Thus, replacement costs are at a minimum.

TO MEET COMPARABLE—OR EQUAL—SPECIFICATIONS

Metcoe will furnish, upon request, free shop drawings to meet "comparable" architectural specifications. Metcoe Spring-Lock flashings have no equal and are competitively priced. Use our free shop drawing service and assure the most satisfactory installation possible.

METCOE Metal Products Co.

P.O. BOX 34851, PALMS STATION, LOS ANGELES 34, CALIFORNIA

• WEBSTER 6-1154

**METHOD OF
INSTALLATION
AND
MANUFACTURER'S
SPECIFICATIONS**

INSTALLATIONS

L. A. Dept. of Water and Power
Los Angeles Fire Dept.
Pacific Tel & Tel
Security-First National Banks
Pacific State Bank
American Savings and Loan,
Temple City
Thrifty Drug Stores
Ralph's Markets
Safeway Markets
Alpha Beta Markets
Boys Markets
Shopping Bag Markets
Thrifty Mart Markets
Fox Markets
Max Factors, Hawthorne
Eastland Shopping Center
Sunset International Building,
Beverly Hills
Buckeye Buildings
and many commercial and
industrial buildings.

CONCRETE SPRING-LOCK

Where indicated on the drawings: Sheet Metal Contractor will furnish Concrete Spring-Lock reglet and snap in positive lock counterflashing of gauge and material specified, as manufactured by Metcoe Metal Products Co., Webster 6-1154. Reglet to be supplied to General Contractor for installation 6" above roof cant strip. Counterflashing to be installed by Sheet Metal Contractor. Stainless Steel Spring-Locks to be set 30" on center. Snap in positive lock counterflashing to be set in place with 3" minimum end lap and end closures as needed. Inside corners, outside corners and joint connectors shall be installed with reglet where needed.

ROOF SPRING LOCK

Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Mike Jackson, FAIA

METCOE *Metal Products Co.*

P.O. BOX 34851, PALMS STATION, LOS ANGELES 34, CALIFORNIA

• WEBSTER 6-1154